



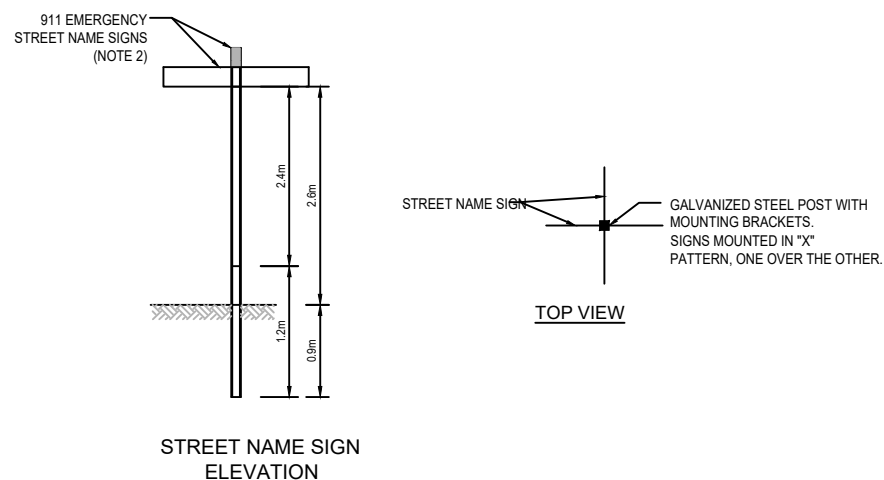

NOTES:

1. REFER TO TOWN ENGINEERING STANDARDS FOR LIST OF MATERIALS & SPECS.
2. REFER TO TOISD 307 FOR DETAILS OF 911 NUMBERING AND STREET NAMES INCLUDING POPPPY DETAIL.
3. SIGNS MAY BE STRAPPED TO STREET LIGHT POLES USING ALUMINUM BRACKETS IF THE POLES ARE PROPERLY POSITIONED AND UPON RECEIVING WRITTEN APPROVAL FROM THE TOWN.
4. STREET NAME SIGNS ARE NOT TO BE MOUNTED ON STOP SIGNS.
5. ALL MOUNTING IS TO BE COMPLETED USING GALVANIZED NUTS, BOLTS & SPACERS.
6. 911 NUMBERS TO BE PROVIDED BY THE TOWN.
7. ACTUAL LOCATION OF STREET NAME BLADES TO BE CONFIRMED BY TOWN.
8. ALL SIGNAGE MUST BE INSTALLED USING A BREAKAWAY SYSTEM.
9. HORIZONTAL MOUNTING OFFSET FOR URBAN OR RESIDENTIAL AREAS WITH RAISED CURBS, 30 CM TO 2 M FROM THE CURB LINE.
10. HORIZONTAL MOUNTING OFFSET FOR RURAL AREAS WITHOUT RAISED CURBS, 2 M TO 4 M FROM THE OUTSIDE EDGE OF THE OUTER TRAFFIC LANE.
11. REFER TO THE ONTARIO TRAFFIC MANUAL (OTM) BOOK 5 AND 11 FOR DETAILS REGARDING TRAFFIC SIGNS AND PAVEMENT MARKINGS.

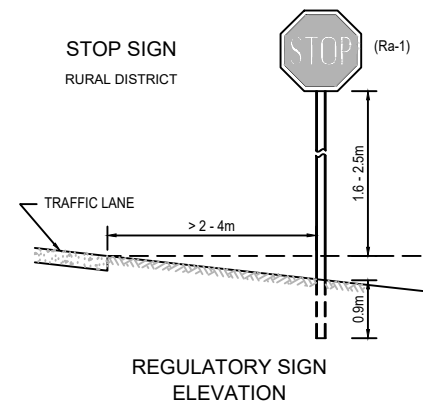

## STANDARD STREET NAME SIGN AND REGULATORY SIGNS

DATE: JUNE 2011

6.	REVISED LINE PAINTING DIST.	TOI	SEPT 2021
5.	STOP SIGN AND 30M OF YELLOW LINE	TOI	MAY 2019
4.	NOTES CHANGED	TOI	APRIL 2011
3.	TO REFLECT TOWN STANDARDS	TOI	MAY 2016
2.	REVISED TOWN LOGO	TOI	APRIL 2011
1.	TO REFLECT TOWN STANDARDS	TOI	MAY 2014
NO.	REVISIONS	APR'D	DATE

**METRIC**  
ALL DIMENSIONS IN mm  
UNLESS OTHERWISE NOTED

TOISD  
301